
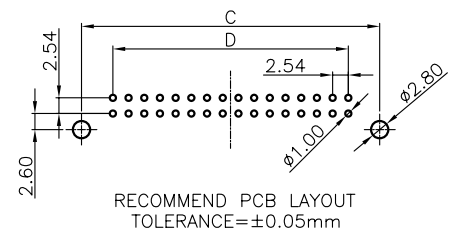

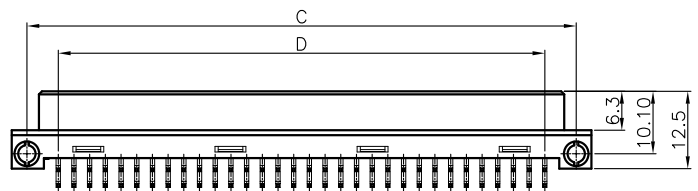
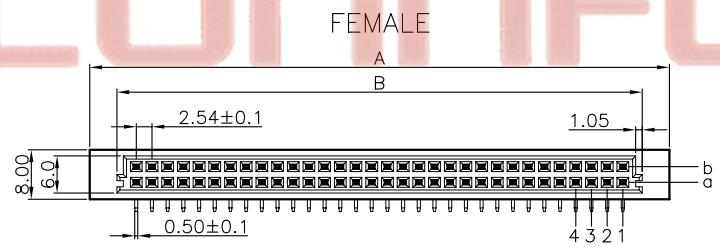

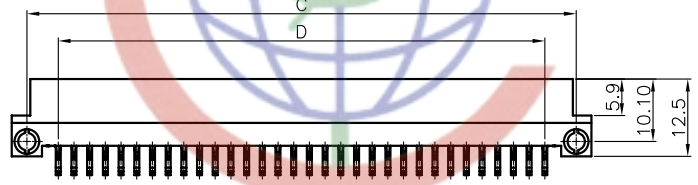


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 02/07/09'	~	LJC 02/07/09'
B	整理图面	YCH 08/18/09'	~	

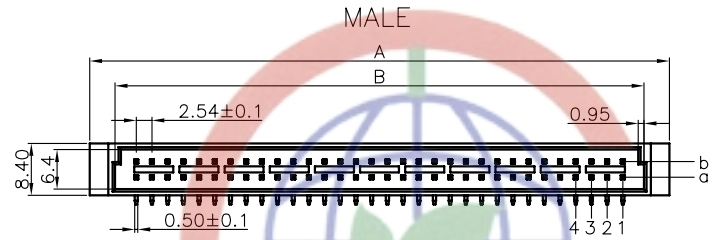

positions	A	B		C	D
		Female	Male		
64P(2*32)	93.8	85.0	85.6	88.9	78.74
32P(2*16)	53.26	44.26	44.7	48.26	38.10

NOTES:

- Specifications:
  - Contact Resistance: 20mΩ max.
  - Insulation Resistance: 1000MΩ min.
  - Current Rating: 2A.
  - Dielectric withstanding voltage: AC 1000V(r.m.s)/60s.
  - Operating Temperature: -40°C to +105°C
  - Recommend Wave Soldering Temperature: 260°C,5-10s.
- Materials:
  - Contact: Copper alloy
  - Housing: Thermoplastic(UL94 V-0)
- Product Number code:

DS1118 - X X X X X X

- Column with Contacts type
  - 1: 1-3 type
  - 2: 2-4 type
  - 3: 1-2-3 type
- Rows with Contacts type
  - 1: a type(1 rows with contact)
  - 2: ab type(2 row with contact)
- Mounting type
  - R: right angle type
- Contact plating
  - 6: full Tin plating
  - 0: selective gold flash
  - C: selective 3u" gold
  - 1: selective 10u" gold
- Connector type
  - M:male F:female
- No.of contacts
  - 64 32
- Series No.
  - DS1118

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	DIN 41612 B TYPE(2ROWS) Right Angle	
X.	±0.60	X.	±5°	mm			
.X	±0.38	.X	±3°				
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		SHEET SIZE	SERIES	DS1118	SERIES
SCALE		1:1	SHEET	A4			
DRAWING NO.		C-DS1118-XXXXRXX		<b>晨翔电子有限公司</b> <b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b>			

Tel:86-574-6350878  
 Fax:86-574-6351087  
 Email:sale@zhenglin.com.cn  
 Http://www.connfly.com

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 02/07/09'	~	LJC 02/07/09'
B	整理图面	YCH 08/18/09'	~	

NOTES:

1. Specifications:

- . Contact Resistance: 20mΩ max.
- . Insulation Resistance: 1000MΩ min.
- . Current Rating: 2A.
- . Dielectric withstanding voltage: AC 1000V(r.m.s)/60s.
- . Operating Temperature: -40°C to +105°C
- . Recommend Wave Soldering Temperature: 260°C,5-10s.




2. Materials:

- . Contact: Copper alloy
- . Housing: Thermoplastic(UL94 V-0)



3. Product Number code:

DS1118 - X X X X X X




- Column with Contacts type
  - 1: 1-3 type
  - 2: 2-4 type
  - 3: 1-2-3 type
- Rows with Contacts type
  - 1: a type(1 rows with contact)
  - 2: ab type(2 row with contact)
- Mounting type
  - V: Vertical type
- Contact plating
  - 6: full Tin plating
  - 0: selective gold flash
  - C: selective 3u" gold
  - 1: selective 10u" gold
- Connector type
  - M:male F:female
- No.of contacts
  - 64 32
- Series No.
  - DS1118

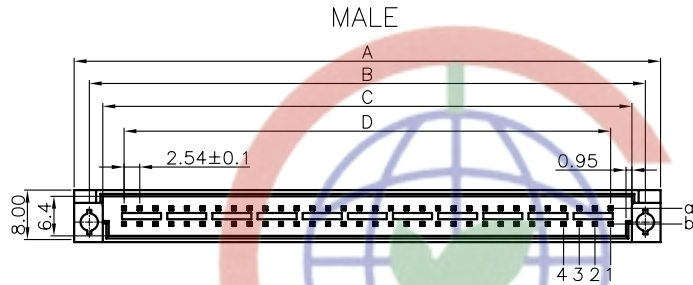

FEMALE

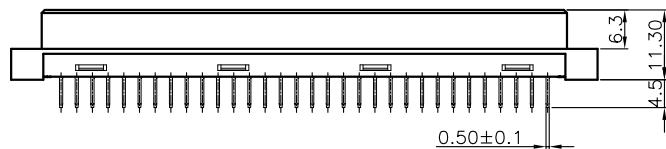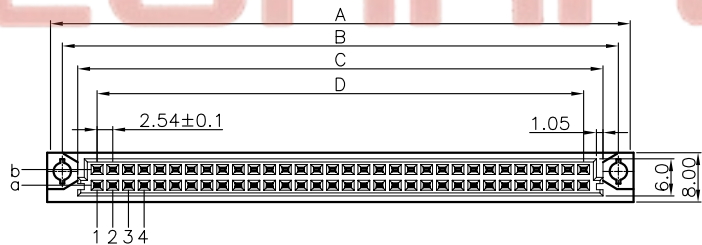

positions	A	B	C		D
			Female	Male	
64P(2*32)	94.9	90.0	85.0	85.6	78.74
32P(2*16)	54.9	50.0	44.26	44.7	38.10




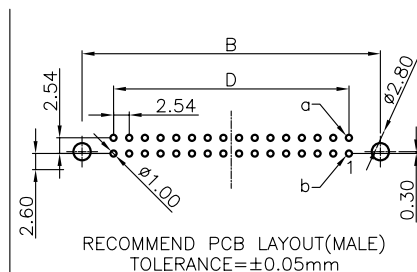
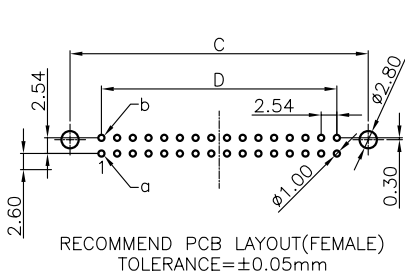



GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	DIN 41612 B TYPE(2ROWS) Vertical Through	
X.	±0.60	X.	±5°	mm		SHEET SIZE	A4
.X	±0.38	.X	±3°			SERIES	DS1118
.XX	±0.25	.XX	±2°			SERIES	DS1118
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 <b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b>			
SCALE		SHEET					
DRAWING NO.		C-DS1118-XXXXVXX					







Tel:86-574-63508787  
 Fax:86-574-63510817  
 E-mail:sale@zhenqin.com.cn  
 Http://www.connfly.com



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 02/07/09'	~	LJC 02/07/09'
B	整理图画	YCH 08/18/09'	~	

Reference to female R/A type

Pitch	Position	Row with conctacts	column with conctacts	Contact Arrange
2.54	64 (2*32)	ab	1-2-3	
		ab	1-3	
		ab	2-4	
		a	1-2-3	
		a	1-3	
		a	2-4	

Reference to female R/A type

Pitch	Position	Row with conctacts	column with conctacts	Contact Arrange
2.54	32 (2*16)	ab	1-2-3	
		ab	1-3	
		ab	2-4	
		a	1-2-3	
		a	1-3	
		a	2-4	

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION		TITLE
X. ±0.60	X. ±5°	UNITS	mm	DIN 41612 B TYPE(2ROWS)
.X ±0.38	.X ±3°	SHEET SIZE	A4	SERIES DS1118 SERIES
.XX ±0.25	.XX ±2°	 <b>晨翔电子有限公司</b> <b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b>		
DRAWING TYPE	CUSTOMER			
SCALE	1:1 SHEET 3 OF 3			
DRAWING NO.	C-DS1118-XXXXXXX	P.C:315333		