


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 09/11/23'	~	

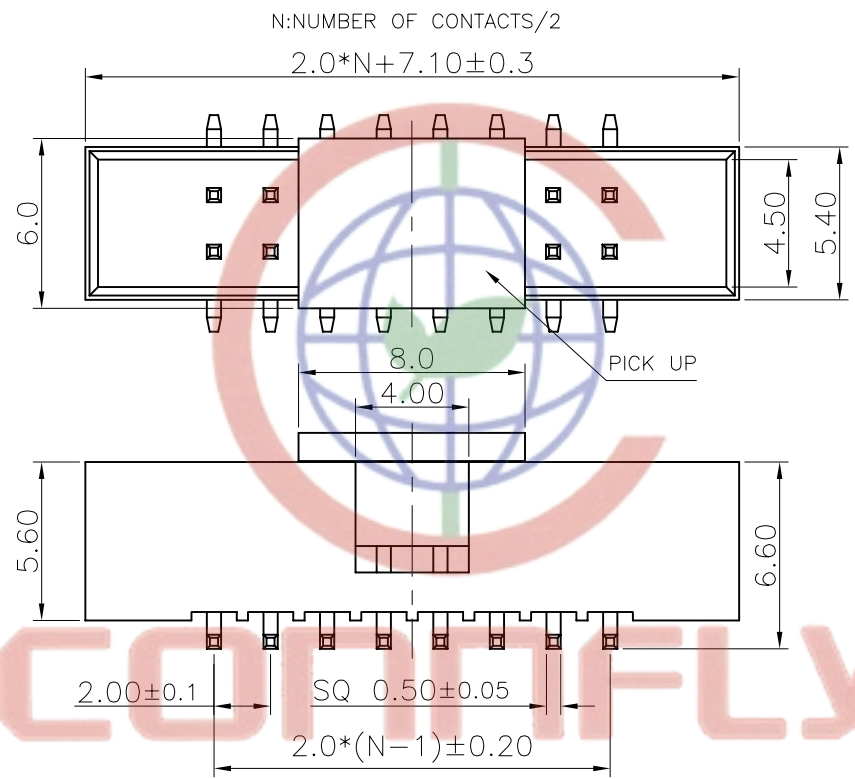



NOTES:

- MATERIAL
  - INSULATOR: THERMOPLASTIC (UL 94V-0).
  - CONTACT: COPPER ALLOY.
- SPECIFICATION
  - TEMPERATURE: -40°C ~ +105°C.
  - CONTACT RESISTANCE: 20mΩ max. (initial).
  - INSULATION RESISTANCE: 1000MΩ min.
  - DIELECTRIC WITHSTANDING VOLTAGE: AC 500V PER MINUTE.
- PART NUMBER: DS1014
- PRODUCT NUMBER CODE:
 

DS1014- X X X X X X

  - PACKING TYPE: T: TRAY, R: TAPE ON REEL, B: TUBE
  - PICK UP SUPPORT: S: W/ PICK UP, X: W/O PICK UP
  - HOUSING COLOR: B: BLACK, W: WHITE, L: BLUE, A: GRAY
  - CONTACT PLATING: F1: FULL GOLD FLASH
  - MOUNTING TYPE: M: SMT TYPE
  - No. OF CONTACTS: 08 10 12 14 16 20 26 30 34 40 50 60 64
  - SERIES No.: DS1014

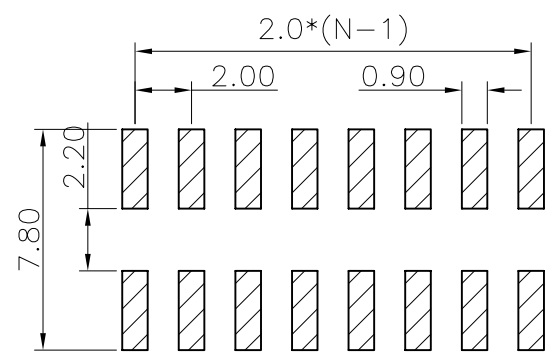

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE
X. ±0.60	X. ±5°	UNITS mm	BOX HEADER PITCH 2.00mm SMT TYPE
.X ±0.38	.X ±3°	SHEET SIZE A4	SERIES DS1014 SERIES
.XX ±0.25	.XX ±2°		
DRAWING TYPE	CUSTOMER	 <b>晨翔电子有限公司</b> <b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b>	
SCALE	1:1 SHEET 1 OF 1		
DRAWING NO.	C-DS1014-XMXXXX		

Tel: 86-574-63508787  
 Fax: 86-574-63510817

E-mail: sale@zhengjin.com.cn

Http://www.zhengjin.com.cn

Address: West Gaojin Town, Cici Ningbo China