




REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 12/04/06'		LJC 12/04/06'
B	DRAWING UPDATE	JLZ 10/20/16'		

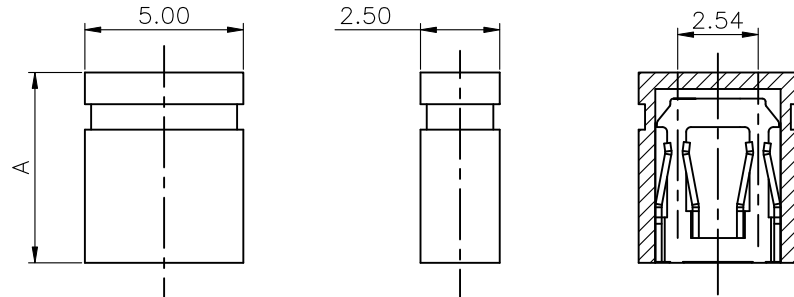


CLOSE TYPE

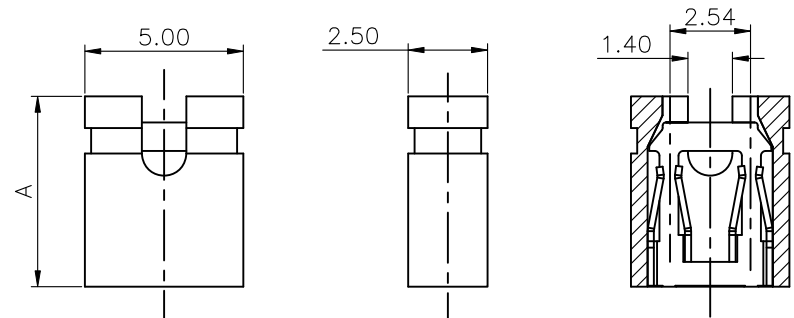

OPEN TYPE

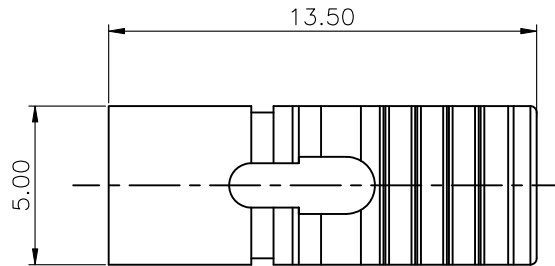

LONG TYPE



NOTES:

- SPECIFICATION:
 - CONTACT RESISTANCE: 30mΩ MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 500MΩ Min.
 - OPERATING TEMPERATURE: -40°C~+105°C.
 - CURRENT RATING:3A.
 - VOLTAGE RATING:250V.
- PRODUCT NUMBER CODE:

DS1027 - X X X X X

- PROFILE HEIGHT(DIM A):
0:6.0mm
1:6.47mm(FOR CLOSE)
- CONTACT PLATING:
F1: FULL GOLD FLASH
N: NICKEL
2: GOLD+NICKEL
- HOUSING COLOR:
B: BLACK U:BLUE Y:YELLOW
W: WHITE E:GREEN R:RED
- HOUSING TYPE:
A:OPEN B:CLOSE L:Long
- No.OF CONTACTS:
2: 2pin
- SERIES No:
DS1027

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION		TITLE	MINI JUMPER PITCH 2.54mm
UNITS	mm		
SHEET SIZE	A4	SERIES	DS1027 SERIES

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1027-XXXXX-B		

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD