

AT-CUT CRYSTAL UNIT (SMD • Ceramic Package)

RoHS Compliant Standard

CS20

2000pcs/reel




Discontinued


FEATURES

- Reliable ceramic package and excellent environmental characteristics.
- Available for wide range of frequency.
- Suitable for various applications such as communication devices, AV devices, automotive devices and measuring instruments.

DIMENSION [mm]

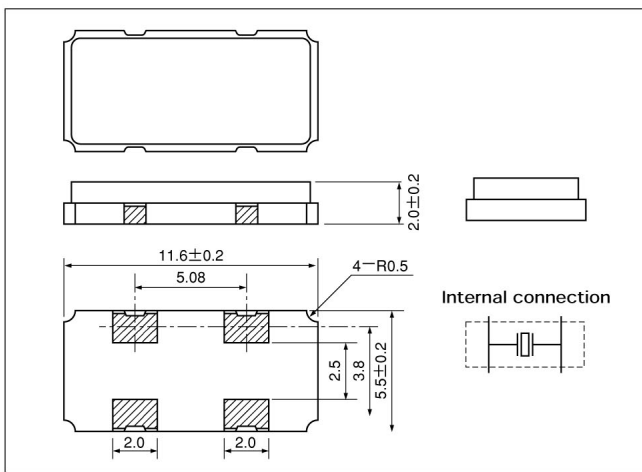

SOLDER PAD LAYOUT [mm]

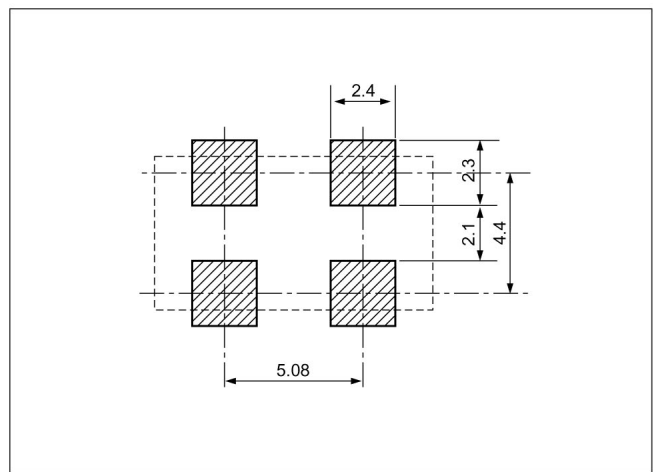

STANDARD SPECIFICATIONS

Item	Model	CS20	Conditions
Nominal Frequency	f_0	3.5MHz~30.0MHz (Fundamental)	Need to contact us for the available frequency
Frequency Tolerance	$\Delta f/f_0$	$\pm 30\text{ppm}$	at 25°C
Frequency Tolerance over Operating Temperature Range	$\Delta f/f_0$	$\pm 50\text{ppm}$	-10°C ~ +60°C
Operating Temperature Range	T_{OPR}	-40°C ~ +85°C	
Storage Temperature Range	T_{STR}	-55°C ~ +125°C	
Motional (series) resistance	R_1	Refer to the following table	at 25°C
Load capacitance	C_L	18.0pF	Need to specify your requirement
Shunt capacitance	C_0	7.0pF Max.	
Level of drive	DL	100 μ W.	
Insulation Resistance	I_R	500M Ω Min.	DC100V \pm 15V
Aging (first year)	$\Delta f/f_0$	$\pm 5\text{ppm Max.}$	25°C \pm 3°C

MOTIONAL (SERIES) RESISTANCE (R_1)

Frequency Range	$3.5\text{MHz} \leq f_0 < 4.0\text{MHz}$	$4.0\text{MHz} \leq f_0 < 6.0\text{MHz}$	$6.0\text{MHz} \leq f_0 < 10\text{MHz}$	$10\text{MHz} \leq f_0 < 14\text{MHz}$	$14\text{MHz} \leq f_0 \leq 30\text{MHz}$
R_1	200 Ω Max.	150 Ω Max.	100 Ω Max.	80 Ω Max.	50 Ω Max.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Citizen:

[CS20-22.1184MBBQ-UT](#) [CS20-15.360MABJ-UT](#) [CS20-3.579545MABJ-UT](#) [CS20-19.6608MBBE-UT](#) [CS20-4.096MABJ-UT](#) [CS20-4.000MABJ-UT](#) [CS20-4.000MBBE-UT](#) [CS20-20.000MABJ-UT](#) [CS20-24.000MABJ-UT](#) [CS20-4.9152MABJ-UT](#) [CS20-4.9152MBBI-UT](#) [CS20-25.000MABJ-UT](#) [CS20-6.144MABJ-UT](#) [CS20-14.7456MABJ-UT](#) [CS20-16.666MABJ-UT](#) [CS20-8.000MAAE-UT](#) [CS20-16.000MABJ-UT](#) [CS20-5.000MABJ-UT](#) [CS20-9.8304MABJ-UT](#) [CS20-7.3728MABJ-UT](#) [CS20-7.200MAAE-UT](#) [CS20-7.680MABJ-UT](#) [CS20-11.0592MABJ-UT](#) [CS20-4.096MABL-UT](#) [CS20-20.480MABJ-UT](#) [CS20-15.000MABJ-UT](#) [CS20-6.000MABJ-UT](#) [CS20-3.6864MBBK-UT](#) [CS20-11.2896MABJ-UT](#) [CS20-3.6864MABJ-UT](#) [CS20-9.830MBBE-UT](#) [CS20-4.9152MBBE-UT](#) [CS20-22.1184MABJ-UT](#) [CS20-12.288MABJ-UT](#) [CS20-14.31818MABJ-UT](#) [CS20-24.576MABJ-UT](#) [CS20-18.432MABJ-UT](#) [CS20-10.000MABJ-UT](#) [CS20-12.000MABJ-UT](#) [CS20-19.440MABJ-UT](#) [CS20-8.000MABJ-UT](#) [CS20-6.000MABI-UT](#)