



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 09/20/05'		


HOUSING WITH CONTACT

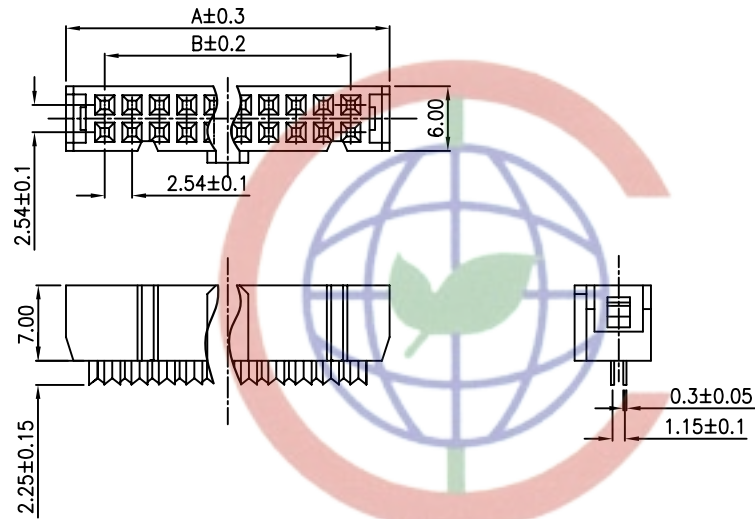

UPPER COVER

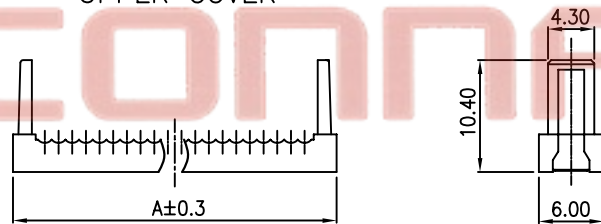

TOP COVER

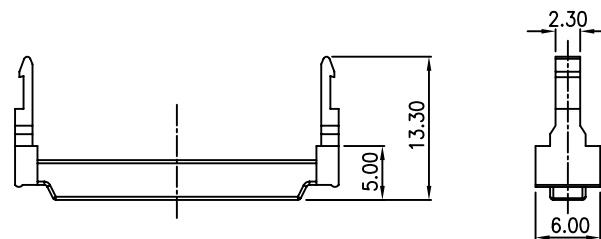


NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - OPERATING TEMPERATURE: 0°C~+85°C.
 - STORAGE TEMPERATURE: -20°C~+70°C.

3. PART NUMBER: DS1016

4. PRODUCT NUMBER CODE:

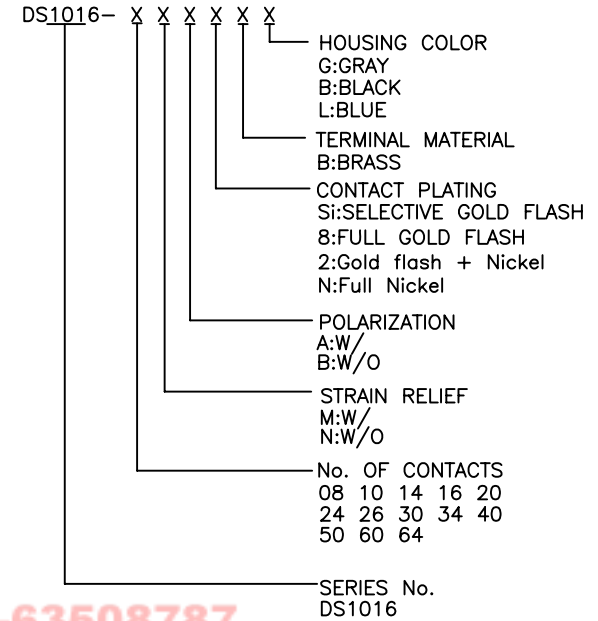

Position	Dimension	
	A	B
08	14.82	7.62
10	17.36	10.16
14	22.44	15.24
16	24.98	17.78
20	30.06	22.86
24	35.14	27.94
26	37.68	30.48
30	42.76	25.56
34	47.84	40.64
40	55.46	48.26
50	68.16	60.96
60	80.86	73.66
64	85.94	78.74

Tel: 86-574-63508787

Fax: 86-574-63510817

Email: sales@connfly.com.cn

Http://www.connfly.com.cn

Http://www.connfly.com.cn

Http://www.connfly.com.cn

Http://www.connfly.com.cn

Http://www.connfly.com.cn

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°		I.D.SOCKET PITCH 2.54mm
.X	±0.38	.X	±3°	UNITS	mm
.XX	±0.25	.XX	±2°	SHEET SIZE	A4
DRAWING TYPE		CUSTOMER		SERIES DS1016 SERIES	
SCALE		1:1		SHEET 1 OF 1	
DRAWING NO.		C-DS1016-XXXXXX		Add.: West Yuhang Road, Ningbo City, Zhejiang Province, China	

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD