


Material:
 Contact: Phosphor,bronze ,Tin-Plated
 Insulator: PBT+G.F.
 Specification
 Current Rating : 1A AC,DC
 Insulation Resistance : 1,000M Ω Min.
 Withstanding Voltage : 500V AC/Min.
 Temperature Range : -55°C~+105°C

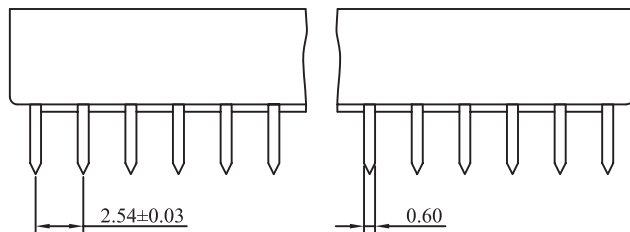

IC SOCKET	A ^{0.00} _{-0.05}	B+0.10
SCL-24	30.48	27.94
SCL-28	30.56	33.02
SCL-32	40.64	38.10
SCL-40	50.80	48.26
SCL-42	53.34	50.80
SCL-48	60.96	58.42

Rev	Descripton/Date	Drawn By: Storm.li
△		Checked By: Simmon
△		Approved By: Tony

Customer:	
Part No.:	SCL-xx
Title:	2.54mm IC Socket 15.24mm

Third angle projection		Units: mm
General Dimenson Tolerance	X.X ±0.25	X.XX ±0.1
	X.XXX ±0.08	

SGS Report No.: