


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 06/01/11'		

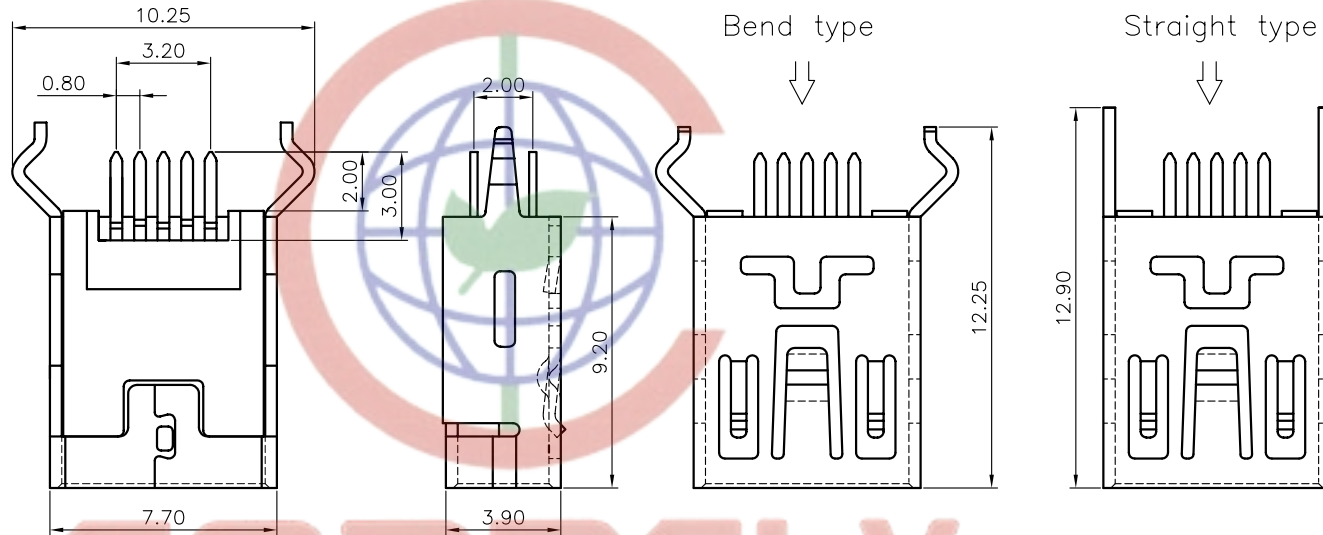

NOTES:

1.SPECIFICATIONS

- .VOLTAGE RATING: 30V(DC)
- .DIELECTRIC WITHSTANDING VOLTAGE: 100VAC 1 minute.
- .CONTACT RESISTANCE: 50mΩ Max.
- .INSULATION RESISTANCE: 100MΩ Min.
- .TEMPERATURE RANGE: -40°C-+105°C



2.MATERIALS

- .HOUSING: High temperature plastic,UL94 V-0
- .SHELL: Copper alloy.
- .CONTACT: Copper alloy.

3.PRODUCT NUMBER CODE:

DS1104-03 - X X X X X

- Packing Type
  - R: Tape On Reel
  - B: Tube
  - T: Tray
- Boardlock type
  - S: Straight type
  - B: Bend type
- Contact plating
  - 0: Selective gold flash
  - C: Selective 3u" gold
- Shell plating
  - 6: Full Matt Tin
  - N: Full Nickel
  - 8: Full Gold
- Color of housing
  - B: BLACK

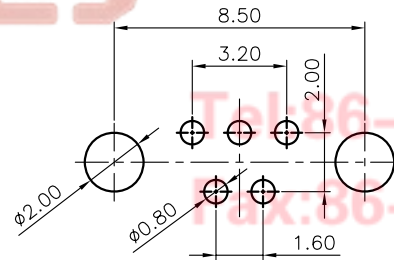

Recommend PCB Layout  
Tolerance=±0.05

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	MINI USB 5 Positions FEMALE V/T TYPE	
X.	±0.60	X.	±5°	mm			
.X	±0.38	.X	±3°	A4	SERIES	DS1104-03 SERIES	
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		<b>晨翔电子有限公司</b> <b>CONNFLY CONNFLY ELECTRONIC CO. LTD</b>			
SCALE		1:1					
DRAWING NO.		C-DS1104-03-XXXXX					