



CMOS/ 3.3V/ 7.0×5.0mm



RoHS Compliant

**Features**

- Miniature ceramic package
- Highly reliable with seam welding
- CMOS output
- Supply voltage Vcc=3.3V
- ±25×10<sup>-6</sup>, ±20×10<sup>-6</sup> available

Table 1

Stability Code	× 10 <sup>-6</sup>	Operating Temperature Range (°C)	Note
0	± 50	-10 to +70	Standard specifications
S	± 30		
U	± 25		
W	± 20		
F	±100	-40 to +85	Please contact us for available frequencies.
G	± 50		
6	± 50	-40 to +105	

**How to Order**

KC7050A 25.0000 C 3 □ E 00  
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series
- ②Output Frequency
- ③Output Type (CMOS)
- ④Supply Voltage (3.3V)
- ⑤Frequency Tolerance (See Table 1)
- ⑥Symmetry/ INH Function (45/ 55%)
- ⑦Individual Specification (STD Specification is "00")

Packaging (Tape & Reel 1000 pcs./ reel)


**Specifications**

Item	Symbol	Conditions	Min.	Max.	Unit	
Output Frequency Range	f <sub>o</sub>		1.8	170	MHz	
Frequency Tolerance	f <sub>tol</sub>	Initial tolerance, Operating temperature range, Rated power supply voltage change, Load change, Aging (1 year @25°C), Shock and vibration	Temp.: -40 to +85°C	-100	+100	×10 <sup>-6</sup>
			Temp.: -10 to +70°C/ -40 to +85°C/ -40 to +105°C	-50	+50	
			Temp.: -10 to +70°C	-30	+30	
			Temp.: -10 to +70°C	-25	+25	
Storage Temperature Range	T <sub>stg</sub>	Standard Specifications	-55	+125	°C	
			Extend (Option)	-40		+85
Operating Temperature Range	T <sub>use</sub>		-40	+85	°C	
				-40		+105
Max. Supply Voltage	—	fo < 135MHz	-0.5	+7.0	V	
		fo ≥ 135MHz	-0.5	+5.0		
Supply Voltage	Vcc	Freq. Tol. Code: 0, S, F	+2.97	+3.63	V	
		Freq. Tol. Code: U, G, 6	+3.14	+3.46		
		Freq. Tol. Code: W	+3.20	+3.40		
Current Consumption (Maximum Loaded)	I <sub>cc</sub>	1.8 ≤ fo ≤ 20MHz	—	10	mA	
		20 < fo ≤ 40MHz	—	15		
		40 < fo ≤ 60MHz	—	30		
		60 < fo ≤ 100MHz	—	35		
		100 < fo ≤ 135MHz	—	45		
Stand-by Current	I <sub>std</sub>		—	10	μA	
Symmetry	SYM	@50% Vcc	45	55	%	
Rise/ Fall Time (10% Vcc to 90% Vcc Maximum Loaded)	Tr/ Tf	1.8 ≤ fo ≤ 26MHz	—	10	ns	
		26 < fo ≤ 45MHz	—	8		
		45 < fo ≤ 100MHz	—	5		
		100 < fo ≤ 170MHz	—	2.5		
Low Level Output Voltage	V <sub>OL</sub>	I <sub>OL</sub> = 8mA	—	10% Vcc	V	
High Level Output Voltage	V <sub>OH</sub>	I <sub>OH</sub> = -8mA	90% Vcc	—	V	
CMOS Load	L <sub>CMOS</sub>	CMOS Output	—	15	pF	
Input Voltage Range	V <sub>IN</sub>		0	Vcc	V	
Low Level Input Voltage	V <sub>IL</sub>		—	30% Vcc	V	
High Level Input Voltage	V <sub>IH</sub>		70% Vcc	—	V	
Disable Time	t <sub>dis</sub>		—	150	ns	
Enable Time	t <sub>ena</sub>		—	5	ms	
Start-up Time	t <sub>str</sub>	@Minimum operating voltage to be 0 sec.	—	10	ms	
1 Sigma Jitter	J <sub>Sigma</sub>	Measured with Wavcrest SIA-3000	1.8 ≤ fo < 40MHz	—	8	ps
			40 ≤ fo ≤ 100MHz	—	5	
			100 < fo ≤ 170MHz	—	4	
Peak to Peak Jitter	J <sub>PK-PK</sub>	Measured with Wavcrest SIA-3000	1.8 ≤ fo < 40MHz	—	80	ps
			40 ≤ fo ≤ 100MHz	—	40	
			100 < fo ≤ 170MHz	—	30	

Note: All electrical characteristics are defined at the maximum load and operating temperature range. Please contact us for inquiry about operating temperature range, available frequencies and other conditions.


**Dimensions**

(Unit: mm)

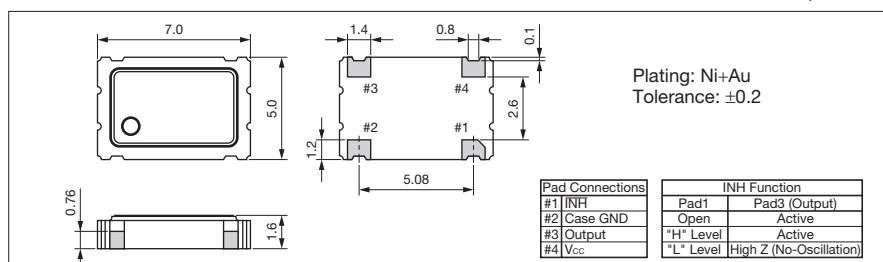

**Recommended Land Pattern**

(Unit: mm)

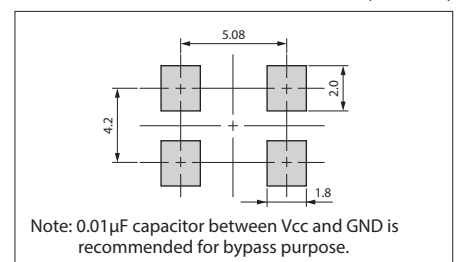

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Kyocera:

<a href="#"><u>KC7050A106.250C30E00</u></a>	<a href="#"><u>KC7050A100.000C30E00</u></a>	<a href="#"><u>KC7050A150.000C30E00</u></a>	<a href="#"><u>KC7050A125.000C30E00</u></a>
<a href="#"><u>KC7050A75.0000C30E00</u></a>	<a href="#"><u>KC7050A14.3182C30E00</u></a>	<a href="#"><u>KC7050A16.0000C30E00</u></a>	<a href="#"><u>KC7050A20.0000C30E00</u></a>
<a href="#"><u>KC7050A24.0000C30E00</u></a>	<a href="#"><u>KC7050A24.5760C30E00</u></a>	<a href="#"><u>KC7050A25.0000C30E00</u></a>	<a href="#"><u>KC7050A27.0000C30E00</u></a>
<a href="#"><u>KC7050A29.4989C30E00</u></a>	<a href="#"><u>KC7050A3.68640C30E00</u></a>	<a href="#"><u>KC7050A30.0000C30E00</u></a>	<a href="#"><u>KC7050A32.0000C30E00</u></a>
<a href="#"><u>KC7050A33.8688C30E00</u></a>	<a href="#"><u>KC7050A40.0000C30E00</u></a>	<a href="#"><u>KC7050A44.0000C30E00</u></a>	<a href="#"><u>KC7050A49.1520C30E00</u></a>
<a href="#"><u>KC7050A50.0000C30E00</u></a>	<a href="#"><u>KC7050A53.1250C30E00</u></a>	<a href="#"><u>KC7050A64.0000C30E00</u></a>	<a href="#"><u>KC7050A66.6667C30E00</u></a>
<a href="#"><u>KC7050A8.00000C30E00</u></a>	<a href="#"><u>KC7050A33.3333C30E00</u></a>	<a href="#"><u>KC7050A32.7680C3GE00</u></a>	<a href="#"><u>KC7050A32.0000C3GE00</u></a>
<a href="#"><u>KC7050A12.0000C3GE00</u></a>	<a href="#"><u>KC7050A40.0000C3GE00</u></a>	<a href="#"><u>KC7050A16.3840C3GE00</u></a>	<a href="#"><u>KC7050A50.0000C3GE00</u></a>
<a href="#"><u>KC7050A27.0000C3GE00</u></a>	<a href="#"><u>KC7050A14.3182C3GE00</u></a>	<a href="#"><u>KC7050A18.4320C3GE00</u></a>	<a href="#"><u>KC7050A7.37280C3GE00</u></a>
<a href="#"><u>KC7050A60.0000C3GE00</u></a>	<a href="#"><u>KC7050A48.0000C3GE00</u></a>	<a href="#"><u>KC7050A1.84320C3GE00</u></a>	<a href="#"><u>KC7050A20.0000C3GE00</u></a>
<a href="#"><u>KC7050A3.68640C3GE00</u></a>	<a href="#"><u>KC7050A49.1520C3GE00</u></a>	<a href="#"><u>KC7050A80.0000C3GE00</u></a>	<a href="#"><u>KC7050A25.0000C3GE00</u></a>
<a href="#"><u>KC7050A64.0000C3GE00</u></a>	<a href="#"><u>KC7050A24.5760C3GE00</u></a>	<a href="#"><u>KC7050A16.0000C3GE00</u></a>	<a href="#"><u>KC7050A10.0000C3GE00</u></a>
<a href="#"><u>KC7050A30.0000C3GE00</u></a>	<a href="#"><u>KC7050A8.00000C3GE00</u></a>	<a href="#"><u>KC7050A4.00000C3GE00</u></a>	<a href="#"><u>KC7050A33.3333C3GE00</u></a>
<a href="#"><u>KC7050A100.000C3GE00</u></a>	<a href="#"><u>KC7050A106.250C3GE00</u></a>	<a href="#"><u>KC7050A125.000C3GE00</u></a>	