
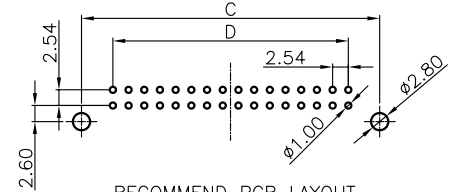

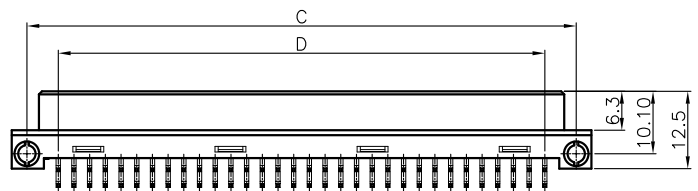
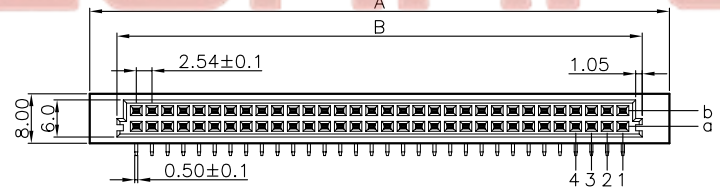

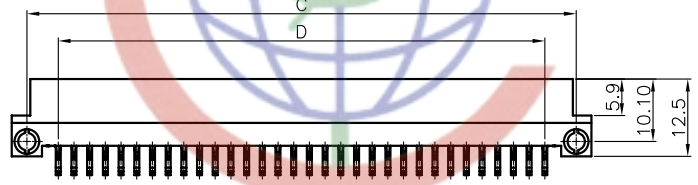


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 02/07/09'	~	LJC 02/07/09'
B	整理图面	YCH 08/18/09'	~	

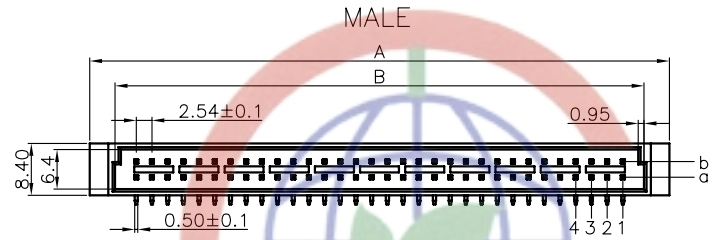

RECOMMEND PCB LAYOUT TOLERANCE=±0.05mm

positions	A	B		C	D
		Female	Male		
64P(2*32)	93.8	85.0	85.6	88.9	78.74
32P(2*16)	53.26	44.26	44.7	48.26	38.10

NOTES:

- Specifications:
 - Contact Resistance: 20mΩ max.
 - Insulation Resistance: 1000MΩ min.
 - Current Rating: 2A.
 - Dielectric withstanding voltage: AC 1000V(r.m.s)/60s.
 - Operating Temperature: -40°C to +105°C
 - Recommend Wave Soldering Temperature: 260°C,5-10s.
- Materials:
 - Contact: Copper alloy
 - Housing: Thermoplastic(UL94 V-0)
- Product Number code:

DS1118 - X X X X X X

- Column with Contacts type
 - 1: 1-3 type
 - 2: 2-4 type
 - 3: 1-2-3 type
- Rows with Contacts type
 - 1: a type(1 rows with contact)
 - 2: ab type(2 row with contact)
- Mounting type
 - R: right angle type
- Contact plating
 - 6: full Tin plating
 - 0: selective gold flash
 - C: selective 3u" gold
 - 1: selective 10u" gold
- Connector type
 - M:male F:female
- No.of contacts
 - 64 32
- Series No.
 - DS1118

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	DIN 41612 B TYPE(2ROWS) Right Angle	
.X	±0.60	.X	±5°	mm			
.X	±0.38	.X	±3°				
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		SHEET SIZE	A4	SERIES	DS1118 SERIES
SCALE		1:1	SHEET	1 OF 3			
DRAWING NO.		C-DS1118-XXXXRXX		晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 02/07/09'	~	LJC 02/07/09'
B	整理图面	YCH 08/18/09'	~	

NOTES:

1. Specifications:

- . Contact Resistance: 20mΩ max.
- . Insulation Resistance: 1000MΩ min.
- . Current Rating: 2A.
- . Dielectric withstanding voltage: AC 1000V(r.m.s)/60s.
- . Operating Temperature: -40°C to +105°C
- . Recommend Wave Soldering Temperature: 260°C,5-10s.




2. Materials:

- . Contact: Copper alloy
- . Housing: Thermoplastic(UL94 V-0)



3. Product Number code:

DS1118 - X X X X X X




- Column with Contacts type
1: 1-3 type
2: 2-4 type
3: 1-2-3 type
- Rows with Contacts type
1: a type(1 rows with contact)
2: ab type(2 row with contact)
- Mounting type
V: Vertical type
- Contact plating
6: full Tin plating
0: selective gold flash
C: selective 3u" gold
1: selective 10u" gold
- Connector type
M:male F:female
- No.of contacts
64 32
- Series No.
DS1118

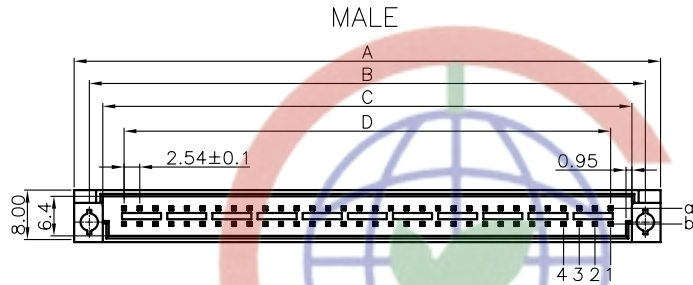

FEMALE

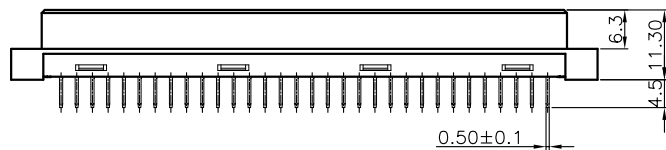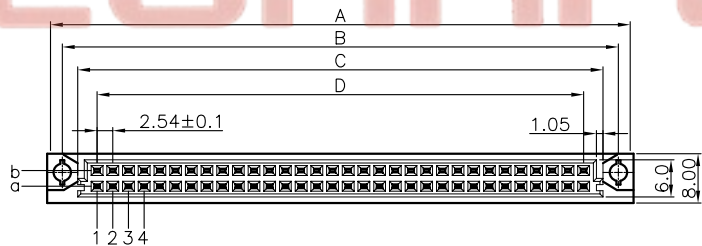







positions	A	B	C		D
			Female	Male	
64P(2*32)	94.9	90.0	85.0	85.6	78.74
32P(2*16)	54.9	50.0	44.26	44.7	38.10




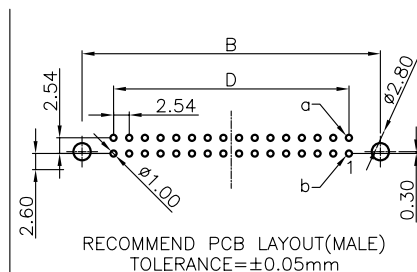
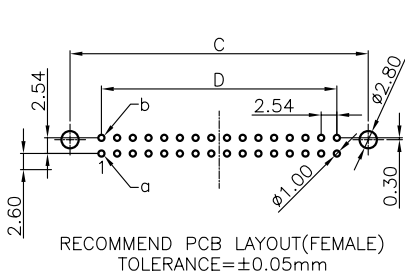





GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	DIN 41612 B TYPE(2ROWS) Vertical Through	
X.	±0.60	X.	±5°	mm		SHEET SIZE	A4
.X	±0.38	.X	±3°		SERIES	DS1118	SERIES
.XX	±0.25	.XX	±2°				
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
SCALE		SHEET					
DRAWING NO.		C-DS1118-XXXXVXX					

Tel:86-574-63508787
 Fax:86-574-63510817
 E-mail:sale@zhenqin.com.cn
 Http://www.connfly.com

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 02/07/09'	~	LJC 02/07/09'
B	整理图画	YCH 08/18/09'	~	

Reference to female R/A type				
Pitch	Position	Row with conctacts	column with conctacts	Contact Arrange
2.54	64 (2*32)	ab	1-2-3	
		ab	1-3	
		ab	2-4	
		a	1-2-3	
		a	1-3	
		a	2-4	

Reference to female R/A type				
Pitch	Position	Row with conctacts	column with conctacts	Contact Arrange
2.54	32 (2*16)	ab	1-2-3	
		ab	1-3	
		ab	2-4	
		a	1-2-3	
		a	1-3	
		a	2-4	

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION		TITLE
X. ±0.60	X. ±5°	UNITS	mm	DIN 41612 B TYPE(2ROWS)
.X ±0.38	.X ±3°	SHEET SIZE	A4	SERIES DS1118 SERIES
.XX ±0.25	.XX ±2°	 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD		
DRAWING TYPE	CUSTOMER			
SCALE	1:1	SHEET	3 OF 3	
DRAWING NO.	C-DS1118-XXXXXXX			

Tel:86-574-63508787
 Fax:86-574-63510817
 E-mail:sale@zhengqi.com
 Http://www.connfly.com
 Add:East Industry Zone, Kang Yan
 P.C:315333