This side stackable plug has a screw connection for the lead wire and a push-on pliable PVC moulding. The conductor and outside diameter cable entry sizes are designed to suit PVC or silicone rubber flexible test cables up to 2,5mm<sup>2</sup>.

MATERIAL


CAP : Brass SIDE PINS : Brass CENTRE PIN : Brass

PLUG BODY : Brass

HOUSING : PVC C21/55 SCREW : Brass, M3,5x0,6

RATING : 20 Amps

## **Dimensions**

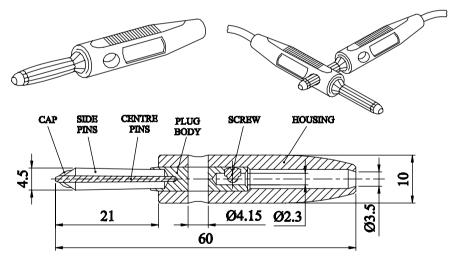

COLOUR	ORDER CODE				
BLACK	555-0100				
BLUE	555-0200				
BROWN	555-0300				
GREEN	555-0400				
RED	555-0500				
WHITE	555-0600				
YELLOW	555-0700				

CONVERTED FROM PS0403 ISS4 (12.12.95) IN JAN 2003

DrgNo 555 SERIES TITLE BUNCH PIN SIDE STACKABLE PLUG						MENSIONS IN MM IN DECIMAL DEGRE	ES D		
	GENERAL SPECIFICATION	CUSTOMER FILTER REF							
	4	FOR 555 SERIES	Aprvd Date 15/10/03	Aprvd By MC	Drwn by BS	Scale: NTS	Sheet 1 / 1		
© Deltron Emcon Limited E-Mail components@deltron-emcon.com, Website www.deltron-emcon.com. Phone +44 1724 273200 Fax +44 1724 270230									