

Number of contacts

# 78+2, 60+4, 42+6, 24+8




Male connectors

Type M  
Agna 00 2 A

Identification	Number of contacts	Contact arrangement	Part No.	Performance levels according to DIN 41 612. Explanation chapter 00	
				3	2 1
Male connector with angled solder pins	78 + 2		09 03 178 7901	09 03 178 6901	09 03 178 2901
	60 + 4		09 03 160 7901	09 03 160 6901	09 03 160 2901
	42 + 6		09 03 142 7901	09 03 142 6901	09 03 142 2901
	24 + 8		09 03 124 7901	09 03 124 6901	09 03 124 2901


## Dimensions

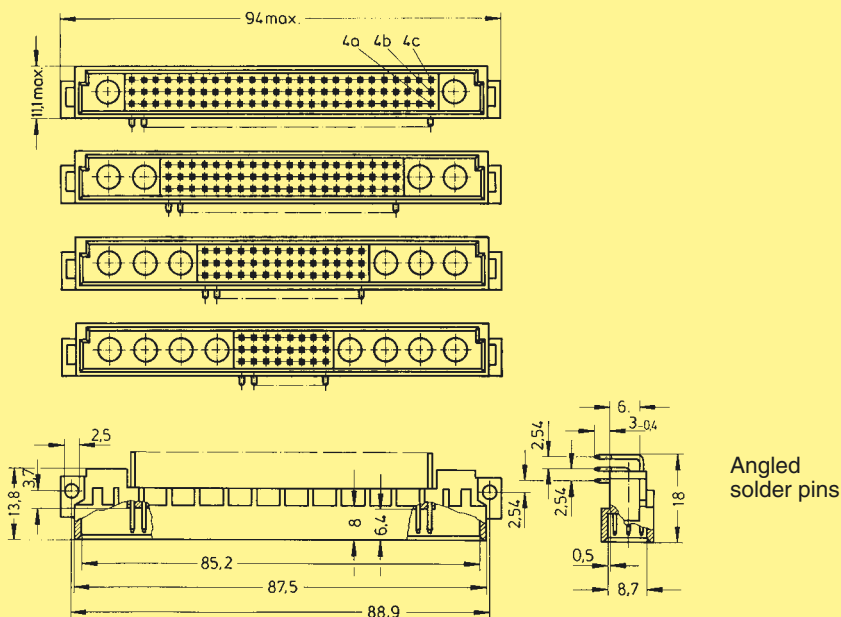

Order high current, high voltage, coaxial and fibre optic contacts separately, see pages 01.30 and 01.31

## Board drillings

Mounting side

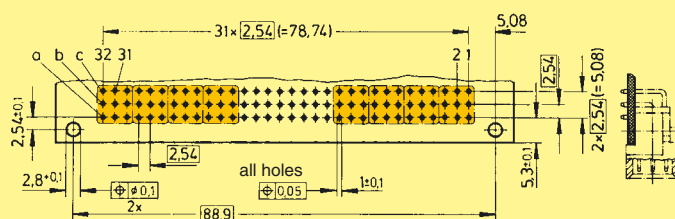

△ Board drillings depend on type and special contact loading

Dimensions in mm