


This side stackable plug has a screw connection for the lead wire and a push-on pliable PVC moulding. The conductor and outside diameter cable entry sizes are designed to suit PVC or silicone rubber flexible test cables up to 2,5mm².

MATERIAL

CAP : Brass
 SIDE PINS : Brass
 CENTRE PIN : Brass
 PLUG BODY : Brass
 HOUSING : PVC 36/20(000-050-0000)
 SCREW : Brass, M3,5x0,6

RATING : 16 Amps
 RATED VOLTAGE: 50V

Dimensions

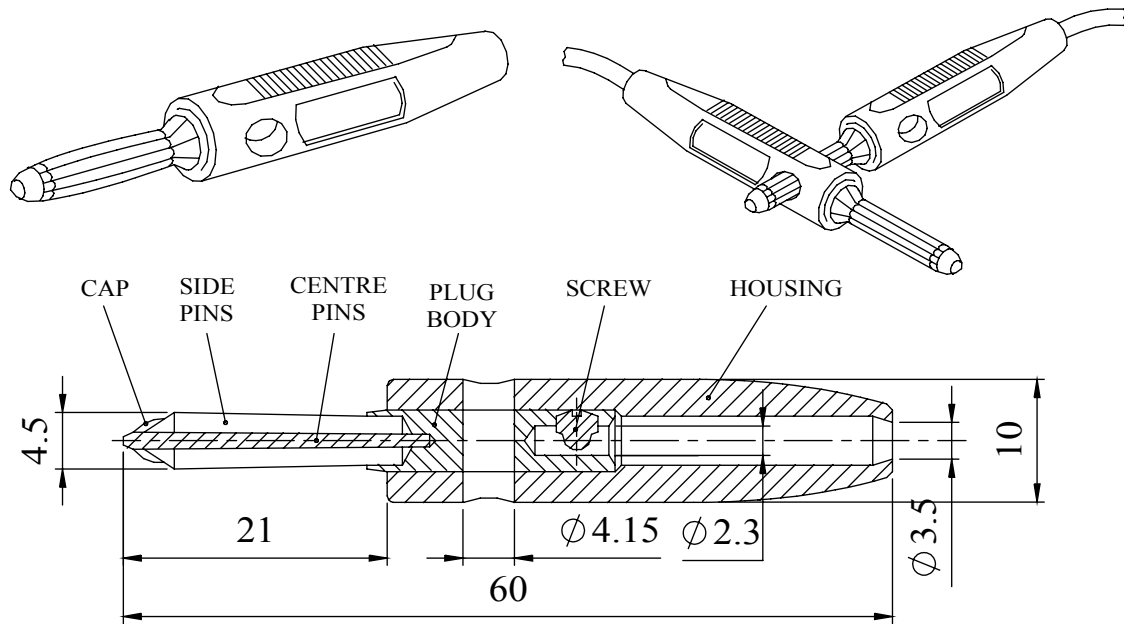

COLOUR	ORDER CODE
BLACK	555-0100
BLUE	555-0200
BROWN	555-0300
GREEN	555-0400
RED	555-0500
WHITE	555-0600
YELLOW	555-0700

BUNCH PIN SIDE STACKABLE PLUG

Tel No. +44(0)1724 273200 Website www.dem-uk.com

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
 ALPHA 3 MANUFACTURING.
 ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF
 ALPHA 3 MANUFACTURING IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN MILLIMETRES
 LINEAR TOLERANCE:
NO DECIMAL PLACES ±0.5mm
1 DECIMAL PLACE ±0.25mm
2 DECIMAL PLACES ±0.125mm
 ANGULAR TOLERANCE: ±1°

DEM Manufacturing, Deltron Emcon House
 Hargreaves Way, Sawcliffe Ind. Park,
 Scunthorpe, North Lincolnshire, DN15 8RF, UK

FINISH

SEE NOTE

DEBURR AND BREAK
 SHARP EDGES

DRAWN BY

SPB

TITLE GENERAL SPECIFICATION

555 SERIES

BUNCH PIN SIDE STACKABLE PLUG

APPROVED BY

WC

THIRD ANGLE PROJECTION

SHEET 1 OF 1

DRAWING NO.

555 SERIES

ISSUE

06

Release

