


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 06/27/08'	~	



Female Terminal

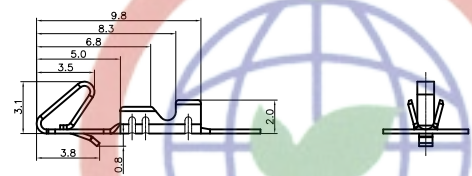



Female Terminal

Wire Range		O.D of Wire
Section Area (mm ²)	AWG#	mm
0.2~0.75	24~18	1.2~2.1


Female Housing



Male Right Angle





Type A



Type B

Male V/T TYPE



N=NO. OF CONTACTS

NOTES:

1. MAIN SPECIFICATIONS

- . Housing material: NYLON 66
- . Wires range: AWG#24~#18
- . Rated voltage: 250V
- . Rated current: 1A
- . Contact resistance: ≤ 30mΩ
- . Insulation resistance: ≥ 1000MΩ
- . Withstanding voltage: 500V,AC 1 minute
- . Temperature range: -25 ~ +85°C

2. PRODUCT NUMBER CODE:

DS1070 - X X X X X X

Bend Type(R/A Only)

A: Type A
B: Type B

Contact Plating
6: Tin

Housing Color
V: Ivory
T: Transparent
W: White

Mounting type
C: Crimp
R: Right Angle
V: V/T type

Connector type
M: Male
F: Female

No.of contact
2 to 20

Tel:86-574-63508789
Fax:86-574-63510817
E-mail:sale@zhengyuan.com.cn
Http://www.connfly.com

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE
X.	±0.60	X.	±5°	mm	P.C.B CONNECTOR Pitch 2.54mm
.X	±0.38	.X	±3°	A4	SHEET SIZE
.XX	±0.25	.XX	±2°		SERIES DS1070
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD	
SCALE		1:1 SHEET 1 OF 1			
DRAWING NO.		C-DS1070-XXXXXX			