



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 06/20/12'	~	

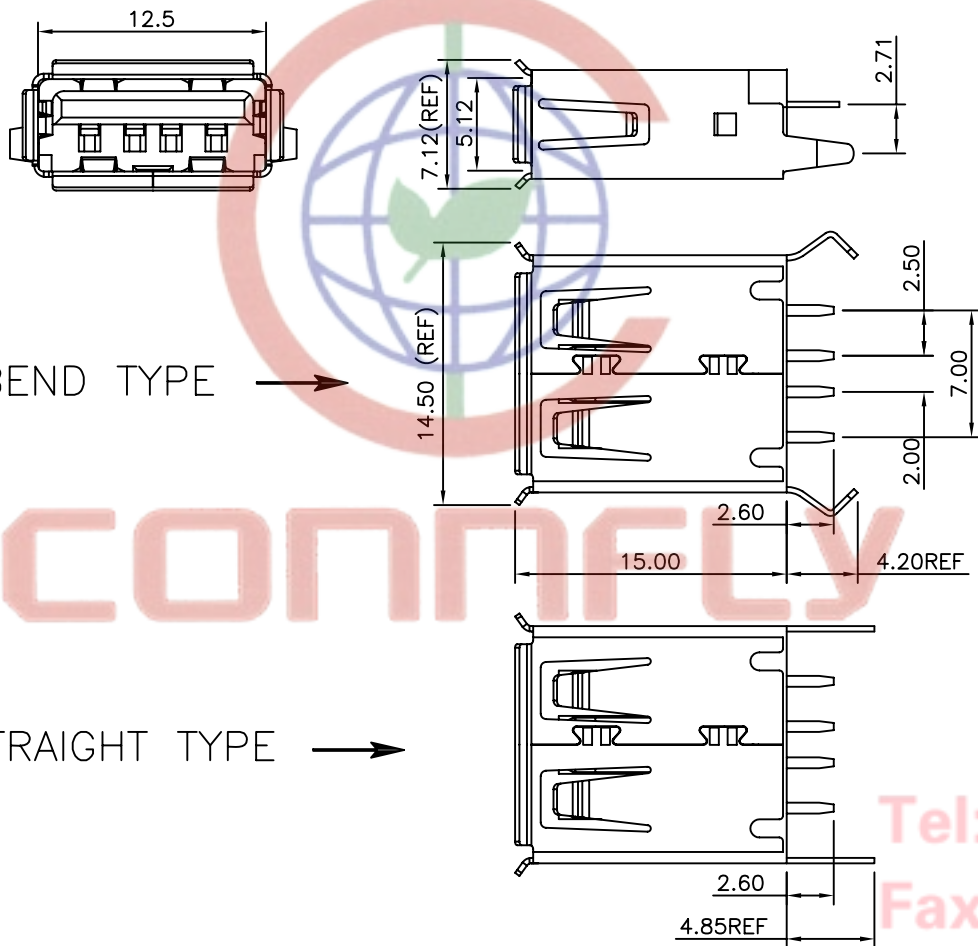


BEND TYPE →

STRAIGHT TYPE →

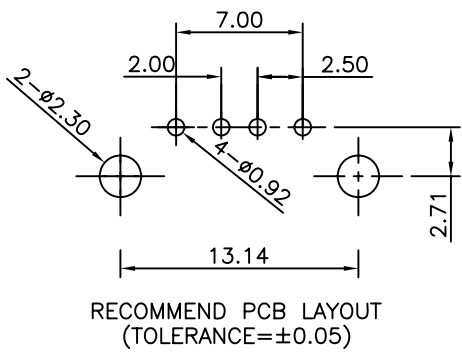

- NOTES:
- SPECIFICATIONS:
 - 1.0 CONTACT RESISTANCE: 30mΩ max.
 - 1.1 INSULATOR RESISTANCE: 1000MΩ min.AT DC 500V.
 - 1.2 CURRENT RATING: 1.5A.
 - 1.3 VOLTAGE RATING: 30V AC/DC.
 - 1.4 DIELECTRIC STRENGTH: AC 500V FOR 1 Minute.
 - MATERIALS:
 - 2.0 HOUSING: PBT+30% GLASS FIBER(UL 94-0).
 - 2.1 CONTACT: COPPER ALLOY
 - 2.2 SHELL: COPPER ALLOY.
 - PRODUCT NUMBER CODE:

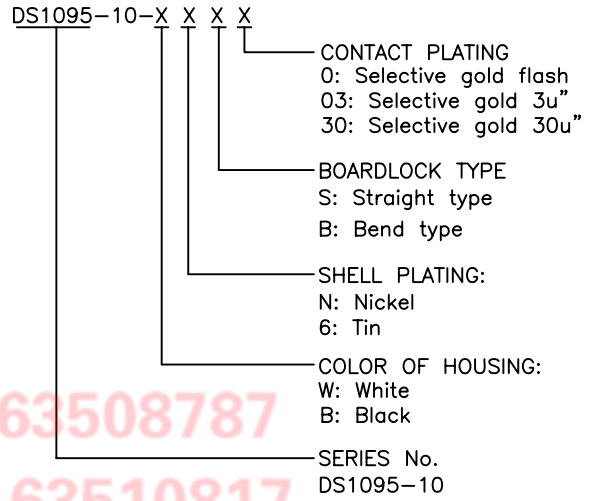

Tel:86-574-63508787
 Fax:86-574-63510817
 E-mail:sale@zhenqin.com.cn
 Http://www.connfly.com

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE
X.	±0.60	X.	±5°	UNITS	mm	USB A/F180° TYPE Single port Female TYPE
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES DS1095-10 SERIES
.XX	±0.25	.XX	±2°	DRAWING TYPE CUSTOMER		
DRAWING TYPE		CUSTOMER		SCALE 1:1 SHEET 1 OF 1		
DRAWING NO.		C-DS1095-10-XXXX		DRAWING NO.		

CONNFLY CONNFLY ELECTRONIC CO. LTD

晨翔电子有限公司