

序号/RevNo.	名称/Title	文件编号/File No.
1	118-A塑料件	QJ/XYT-11132
2	118-A端子	QJ/XYT-11120



Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA
 Insulator Resistance: 1000MΩmin.at DC 500V
 Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 1000V For 1 minute
 Operating Temperature: -55°C--+105°C
 Contact: Brass

Housing: PBT &30% Glass Fiber (UL 94V-0)

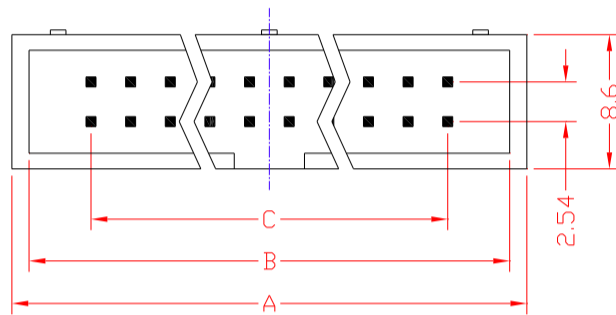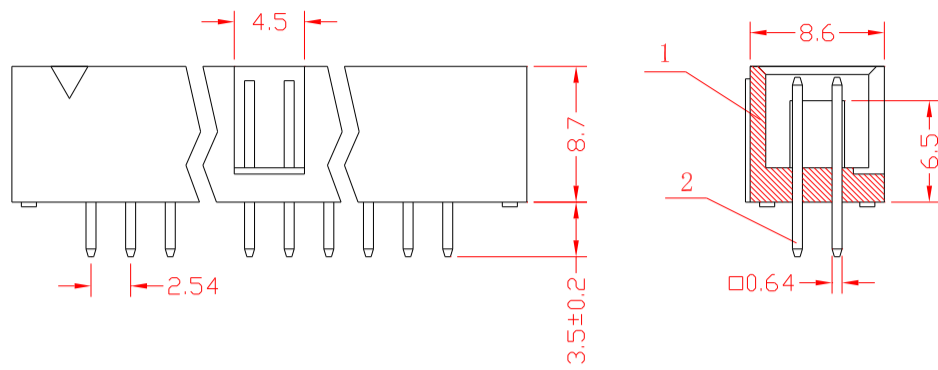

Position	A	B	C
10	20.30	18.10	10.16
12	22.84	20.64	12.70
14	25.38	23.18	15.24
16	27.92	25.72	17.78
20	33.00	30.80	22.86
26	40.62	38.42	30.48
30	45.70	43.50	35.56
34	50.78	48.58	40.64
40	58.40	56.20	48.26
50	71.10	68.90	60.96
60	83.80	81.60	73.66
64	88.88	86.68	78.74

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance
				x. =0.2 x.' =2" .x =0.1 .x' =1" .xx =0.05 .xx'=0.5" .xxx =0.01
图名/Title			文件编号/File No.	
118-A直针			QJ/XYT-12046	
备注/Remark			页序/Sheet	单位/Units: mm

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date
-----------	--------------------	--------------	---------

序号/RevNo.	名称/Title	文件编号/File No.
1	118-A塑料件	QJ/XYT-11132
2	118-A端子(短)	QJ/XYT-11120
3	118-A端子(长)	QJ/XYT-11120


Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA
 Insulator Resistance: 1000MΩmin.at DC 500V
 Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 1000V For 1 minute
 Operating Temperature: -55°C- +105°C
 Contact: Brass

Housing: PBT &30% Glass Fiber (UL 94V-0)

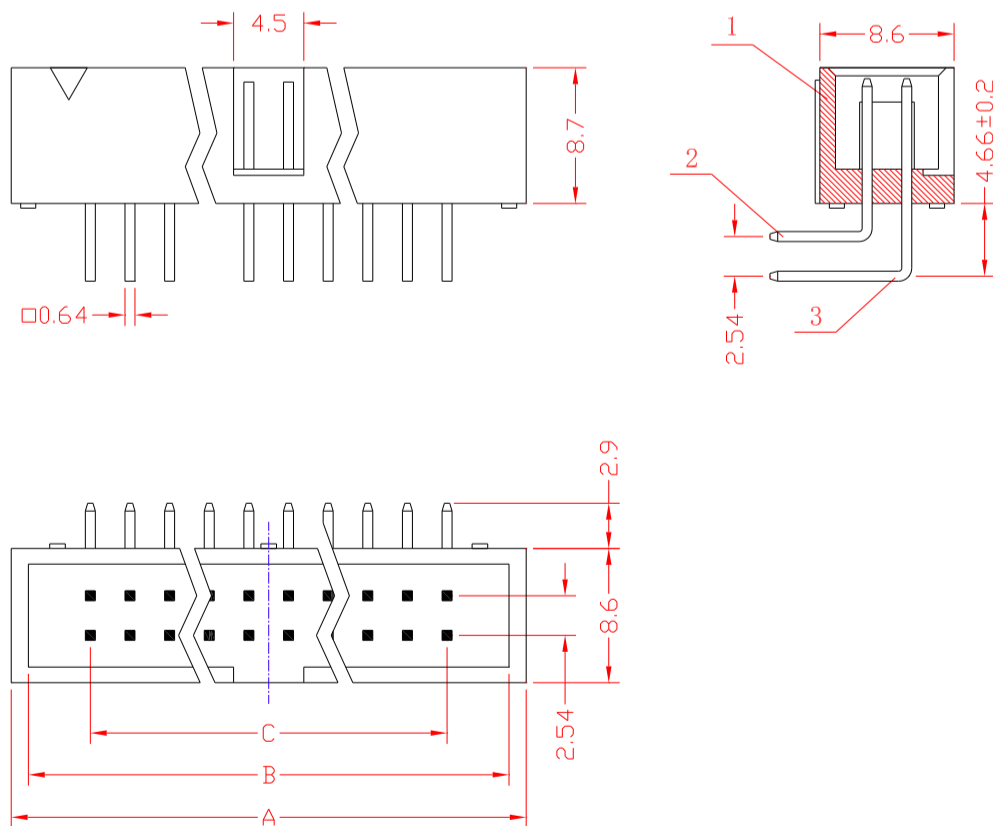

Position	A	B	C
10	20.30	18.10	10.16
12	22.84	20.64	12.70
14	25.38	23.18	15.24
16	27.92	25.72	17.78
20	33.00	30.80	22.86
26	40.62	38.42	30.48
30	45.70	43.50	35.56
34	50.78	48.58	40.64
40	58.40	56.20	48.26
50	71.10	68.90	60.96
60	83.80	81.60	73.66
64	88.88	86.68	78.74

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance
				x. =0.2 x.' =2" .x =0.1 .x' =1" .xx =0.05 .xx'=0.5" .xxx =0.01
图名/Title			文件编号/File No.	
118-A弯针			QJ/XYT-12047	
备注/Remark			页序/Sheet	单位/Units: mm

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date
-----------	--------------------	--------------	---------