

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 09/08/08'	~	

NOTES:

- MATERIAL
 - INSULATOR:THERMOPLASTIC(UL 94V-0).
 - CONTACT: COPPER ALLOY.
- SPECIFICATION
 - INSULATION RESISTANCE:1000MΩ min.
 - DIELECTRIC WITHSTANDING VOLTAGE:AC 500V PER MINUTE.





3. PRODUCT NUMBER CODE:

DS1018-02- X X X

- X CONTACT PLATING
- 8: FULL GOLD FLASH
- 6: TIN
- 2: NICKEL+GOLD FLASH

Housing Color
B: Black

No. OF CONTACTS
04~80

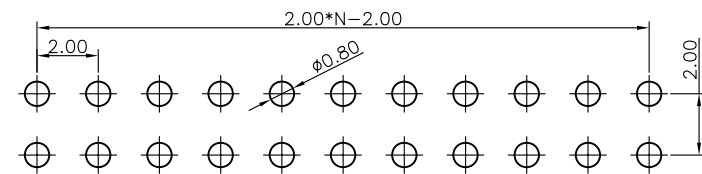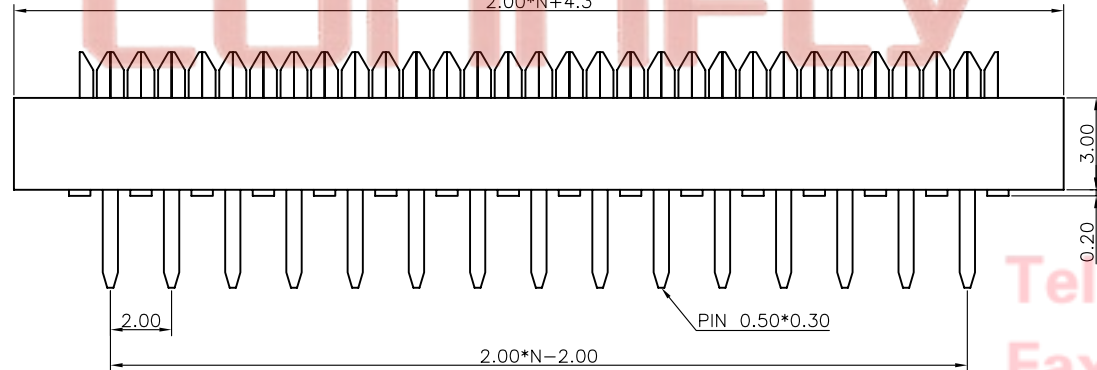

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION		TITLE	DIP PLUG CONNECTOR PITCH 2.00mm
X. ±0.60	X. ±5°	UNITS	mm	SHEET SIZE	A4
.X ±0.38	.X ±3°	DRAWING TYPE	CUSTOMER	SERIES	DS1018-02 SERIES
.XX ±0.25	.XX ±2°	SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1018-02-XXX	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			

Tel:86-574-63508787
 Fax:86-574-63510817
 E-mail:sale@zhenqin.com.cn
 Http://www.connfly.com