


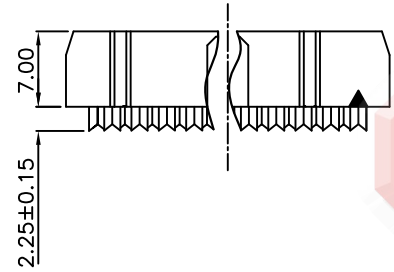
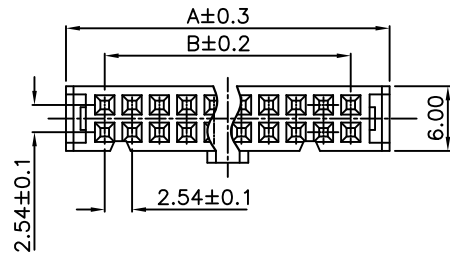


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 09/20/05'		LJC 09/20/05'
B	ADD PACKING TYPE	JLZ 04/02/15'		


HOUSING WITH CONTACT



UPPER COVER




TOP COVER

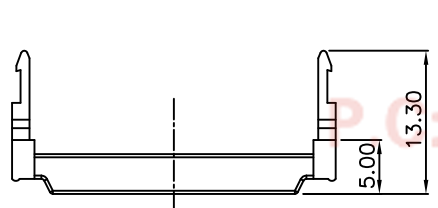

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CONTACT RESISTANCE: 20mΩ Max. INITIAL.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
- ENVIRONMENT CHARACTERISTICS:
 - TEMPERATURE: -40°C~+105°C.
- PART NUMBER: DS1016
- PRODUCT NUMBER CODE:

DS1016- X X X X X X - X

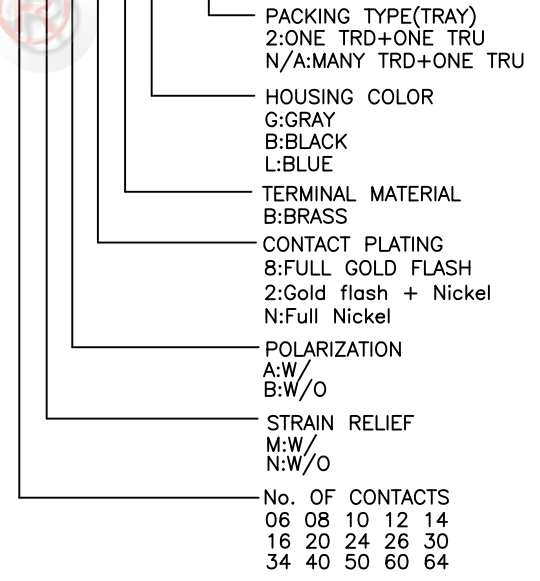

Position	Dimension	
	A	B
06	12.28	5.08
08	14.82	7.62
10	17.36	10.16
12	19.90	12.70
14	22.44	15.24
16	24.98	17.78
20	30.06	22.86
24	35.14	27.94
26	37.68	30.48
30	42.76	25.56
34	47.84	40.64
40	55.46	48.26
50	68.16	60.96
60	80.86	73.66
64	85.94	78.74

Tel:86-574-6350777
 Fax:86-574-6350955
 E-mail:sale@connfly.com
 http://www.connfly.com
 Add:East Industrial Zone, KuangYan Town Cixi Ningbo China
 P:315033

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION		TITLE	I.D.CSOCKET PITCH 2.54mm
UNITS	mm	SHEET SIZE	A4
SHEET SIZE	A4	SERIES	DS1016 SERIES

DRAWING TYPE	CUSTOMER
SCALE	1:1 SHEET 1 OF 1
DRAWING NO.	C-DS1016-XXXXXX-X-B

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD