

**SPECIFICATION**


Current Rate:1 AMP  
 Insulation Resistance:1000M Ω Min.  
 Contact Resistance:20m Ω Max.  
 Dielectric Voltage:500V AC for one minute  
 Operation Temperature:-40°C to +105°C

**MATERIAL**

Insulator:Polyester,UL 94V-0  
 Standard:Nylon 6T  
 Contact Pin:Copper Alloy  
 Contact Plating:Gold Flash all over

## PLL1.27-x

Pin Header 1.27mm SQ Pin=0.4mm 1 Row H=1.0/1.7/1.5/2.5mm Straight Type

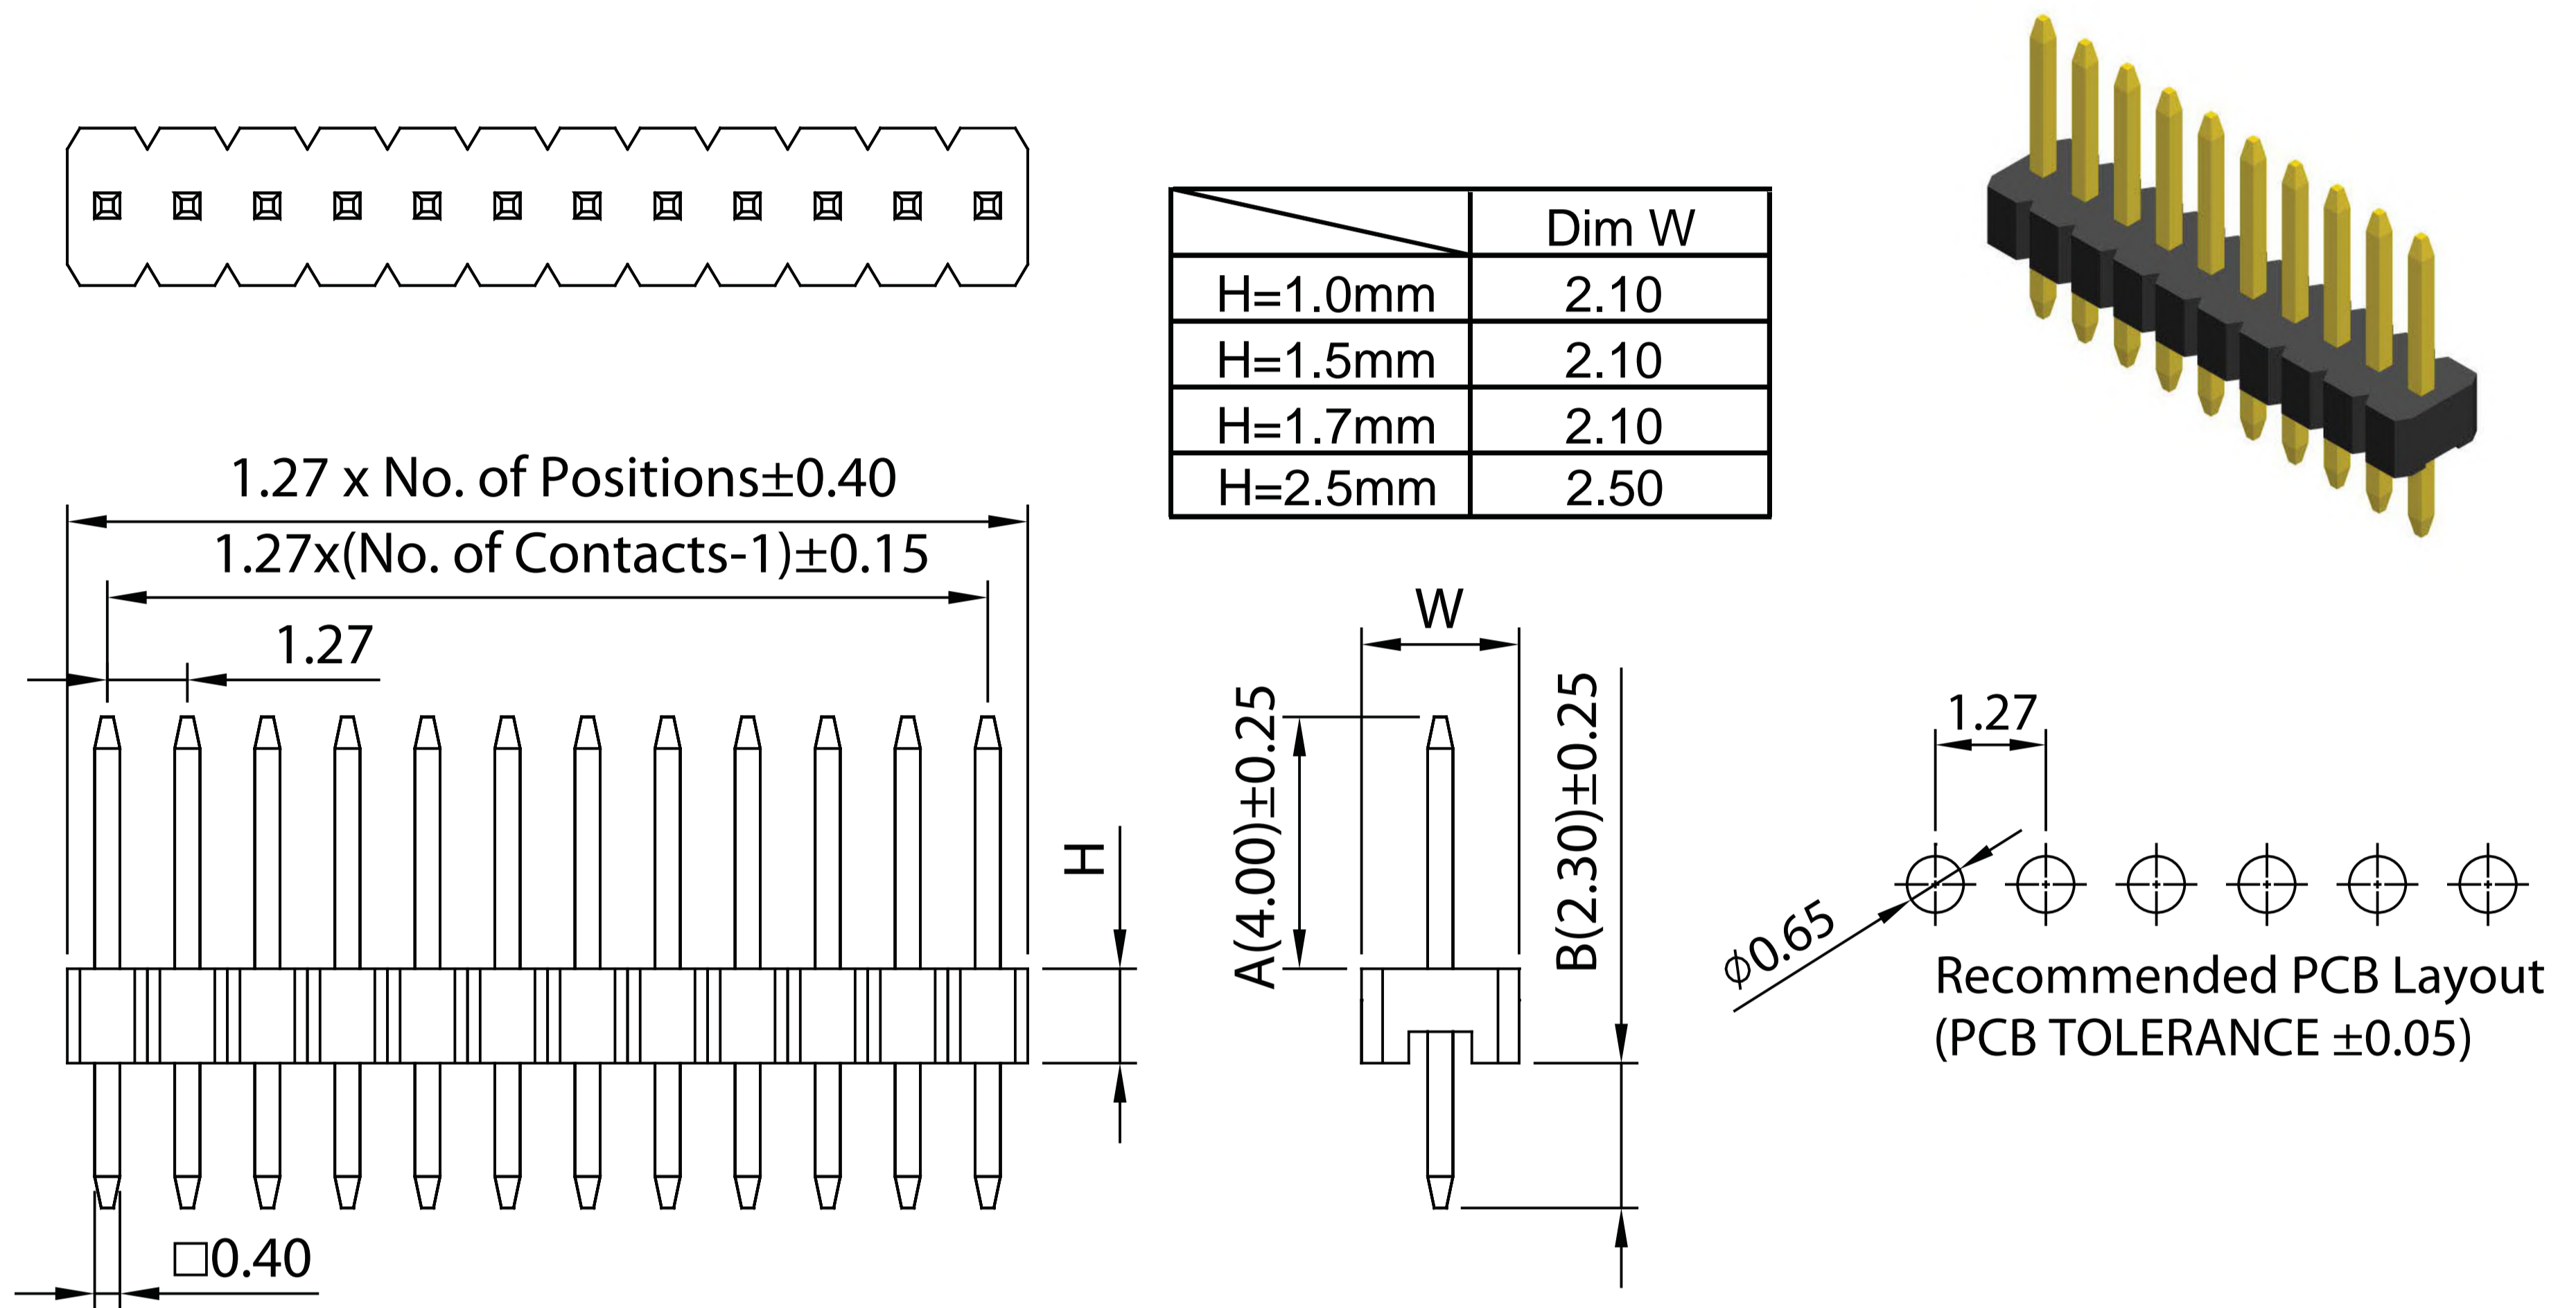

## PLLD1.27-x

Pin Header 1.27mm SQ Pin=0.4mm 2 Row H=0.85/1.0/1.5/1.7/2.0/2.5mm Straight Type

