
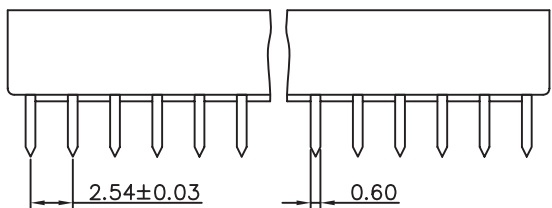


Material:  
 Contact: Phosphor bronze, Tin-Plated  
 Insulator: PBT+G.F.  
 Specification  
 Current Rating : 1A AC,DC  
 Insulation Resistance : 1,000MΩ Min.  
 Withstanding Voltage : 500V AC/Min.  
 Temperature Range : -55°C~+105°C



IC SOCKET	A <sup>+0.00</sup> <sub>-0.05</sub>	B+0.10
SCS-6	7.62	5.08
SCS-8	10.16	7.62
SCS-14	17.78	15.24
SCS-16	20.32	17.78
SCS-18	22.86	20.32
SCS-20	25.40	22.86
SCS-22	27.94	25.40
SCS-24	30.48	27.94
SCS-28	35.56	33.02
SCS-32	40.64	38.10

Rev	Descripton/Date	Drawn By: Storm.li	Customer:	Third angle projection 			Units: mm		
△		Checked By: Simmon	Part No.:	SCS-xx			General Dimenson Tolerance		
△		Approved By: Tony	Title:	2.54 mm IC Socket 7.62mm			X.X ±0.25	X.XX ±0.1	X.XXX ±0.08
SGS Report No.:									