

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LL 07/02/06'	~	LJC 07/02/06'
B	ADD P/N CODE	LJC 12/12/13'	~	LJC 12/12/13'
C	ADD BEND TYPE	JLZ 12/30/14'	~	


NOTES:

- SPECIFICATIONS:
 - CONTACT RESISTANCE: 20mΩ Max.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000MΩ Min.
 - OPERATING TEMPERATURE: -40°C~+105°C.
 - MALE PIN RANGE: $\phi 0.381 \sim 0.635$.
 - CURRENT RATING: 3A Per Pin Max.

2. PRODUCT NUMBER CODE:

DS1002-01 - X X X X X - X


- CLIP TYPE®
- JK: IMPORT
- GC: DOMESTIC
- Bend Type(Single Row Only) ©
- A: R1 Type
- B: R2 Type
- Clip plating
 - 1: Tin 150u" 2: Tin 200u"
 - 3: G/F 4: Gold 3u"
 - 5: Gold 10u" 6: Gold 15u"
- Pin plating
 - 1: Tin 150u" 2: Tin 200u"
 - 3: G/F 4: Gold 3u"
 - 5: Gold 10u" 6: Gold 15u"
- Mounting type
 - V: V/T TYPE
 - R: R/A TYPE
 - S: SMT TYPE
- No. of contacts
 - 1*1 - 1*64
 - 2*1 - 2*40

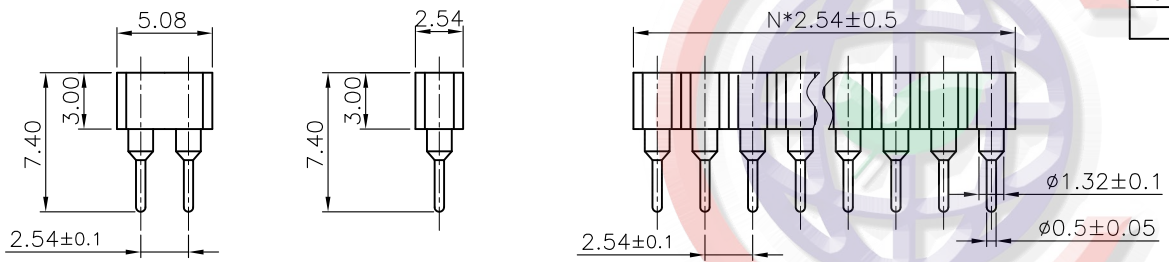

Dual rows

Single row


V/T TYPE

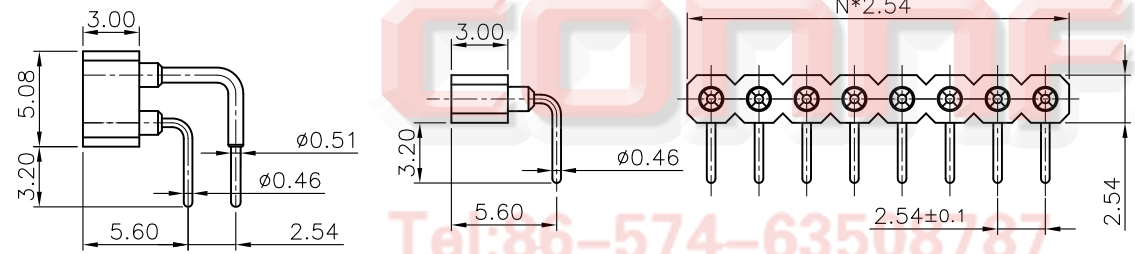

Dual rows

Single row

R/A TYPE

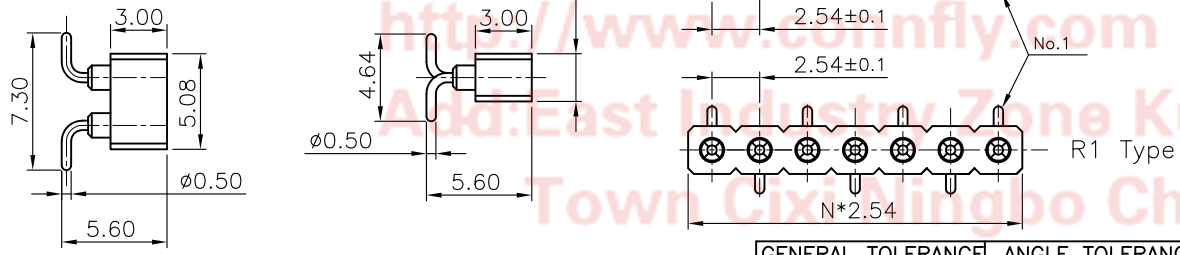

Dual rows

Single row

SMT TYPE

N: No. of contacts

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	10F1
DRAWING NO.	C-DS1002-01-XXXX-X-C		

PROJECTION	TITLE	2.54mm IC SOCKET(Machine Pin)	
UNITS	mm	R/A, V/T & SMT Type	
SHEET SIZE	A4	SERIES	DS1002-01 SERIES

晨翔电子有限公司
CONNFLY® CONNFLY ELECTRONIC CO., LTD

CONNFLY

Tel: 86-574-63508787

Fax: 86-574-63510817

E-mail: sales@connfly.com

http://www.connfly.com

Add: East Industry Zone KuangYan

Town Cixi Ningbo China

P.O. 315333