

序号/RevNo.	名称/Title	文件编号/File No.
1	125塑料件	QJ/XYT-11141
2	125端子	QJ/XYT-11142

Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA
 Insulator Resistance: 1000MΩ min.at DC 500V
 Current Rating: 1AMP




Dielectric Withstanding

Voltage: AC 500V For 1 minute

Operating Temperature: -55°C---+105°C

Contact: Phosphor bronze

Housing: PBT &30% Glass Fiber(UL 94V-0)

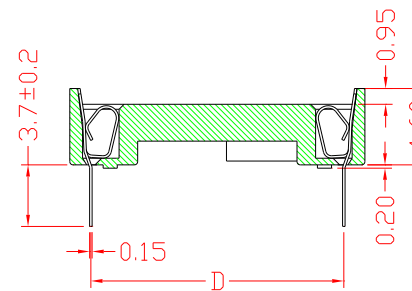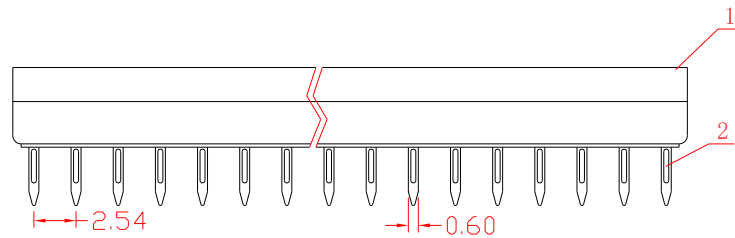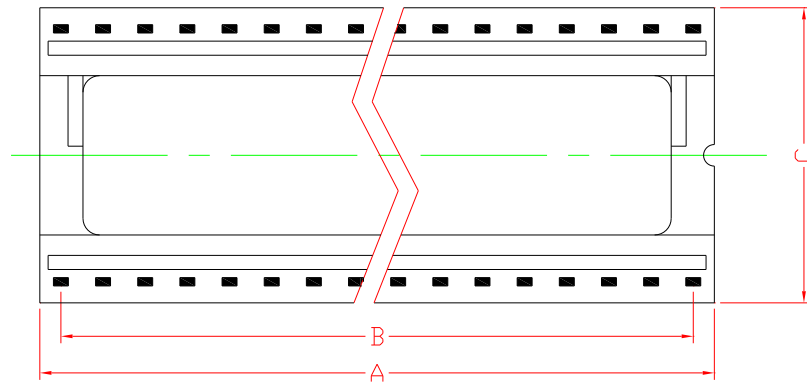

Position	Dimension			
	A	B	C	D
6	7.62	5.08	10.16	7.62
8	10.16	7.62	10.16	7.62
14	17.82	15.24	10.16	7.62
16	20.32	17.78	10.16	7.62
18	22.86	20.32	10.16	7.62
20	25.40	22.86	10.16	7.62
24	30.48	27.94	10.16	7.62
24	30.48	27.94	17.78	15.24
28	35.56	33.02	10.16	7.62
28	35.56	33.02	17.78	15.24
32	40.54	38.10	17.78	15.24
40	50.80	48.26	17.78	15.24
42	53.21	50.80	17.78	15.24

要求:

1. 塑料件无裂痕。
2. 整排端子成一直线，相邻端子之间相互平行。

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
				x. ±0.2	x.' ±2°
				.x ±0.1	.x' ±1°
				.xx ±0.05	.xx' ±0.5°
				.xxx ±0.01	
				单位/Units: mm	