


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0532610771](#)
Status: **Active**
Overview: [PicoBlade Connector System](#)
Description: 1.25mm Pitch, PicoBlade PCB Header, Single Row, Right-Angle, Surface Mount, Tin (Sn) Plating, Friction Lock, 7 Circuits, Tape and Reel

Documents:

Drawing (PDF)	Application Specification 510210000-AS-000 (PDF)
3D Model (PDF)	Packaging Specification SPK-53261-002-001 (PDF)
3D Model	RoHS Certificate of Compliance (PDF)
Product Specification PS-51021-024-001 (PDF)	

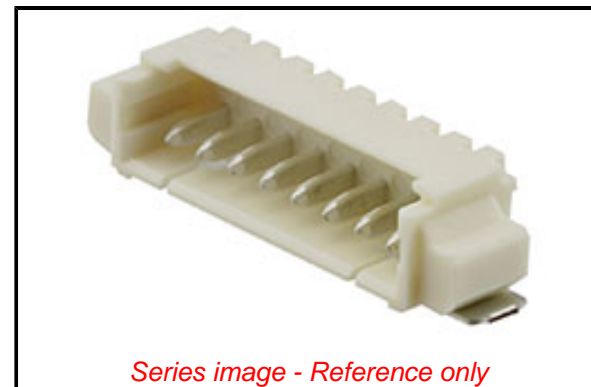

Series image - Reference only

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	PCB Headers
Series	53261
Application	Signal, Wire-to-Board
Current Derating Order No	987651-3691
Overview	PicoBlade Connector System
Product Name	PicoBlade
UPC	822348161102

Physical

Breakaway	No
Circuits (Loaded)	7
Circuits (maximum)	7
Color - Resin	Natural
Durability (mating cycles max)	30
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	Yes
Keying to Mating Part	None
Lock to Mating Part	Yes
Mated Height	3.40mm
Material - Metal	Phosphor Bronze
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	219.100/mg
Number of Rows	1
Orientation	Right Angle
PCB Locator	No
PCB Retention	Yes
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface	1.25mm
Plating min - Mating	1.016µm
Plating min - Termination	1.016µm
Polarized to PCB	Yes
Shrouded	Fully
Stackable	No
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Surface Mount

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2020)4578-DC (25
June 2020)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[53261](#) Series

Mates With

PicoBlade Housing [51021](#)
PicoBlade
Cable Assembly [15134](#)

Electrical

Current - Maximum per Contact
Voltage - Maximum

1.0A
125V

Material Info**Reference - Drawing Numbers**

Application Specification
Packaging Specification
Product Specification
Sales Drawing

510210000-AS-000
SPK-53261-002-001
PS-51021-024-001
SD-51021-002, SD-53261-023-001, SD-53261-024

This document was generated on 07/27/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION